


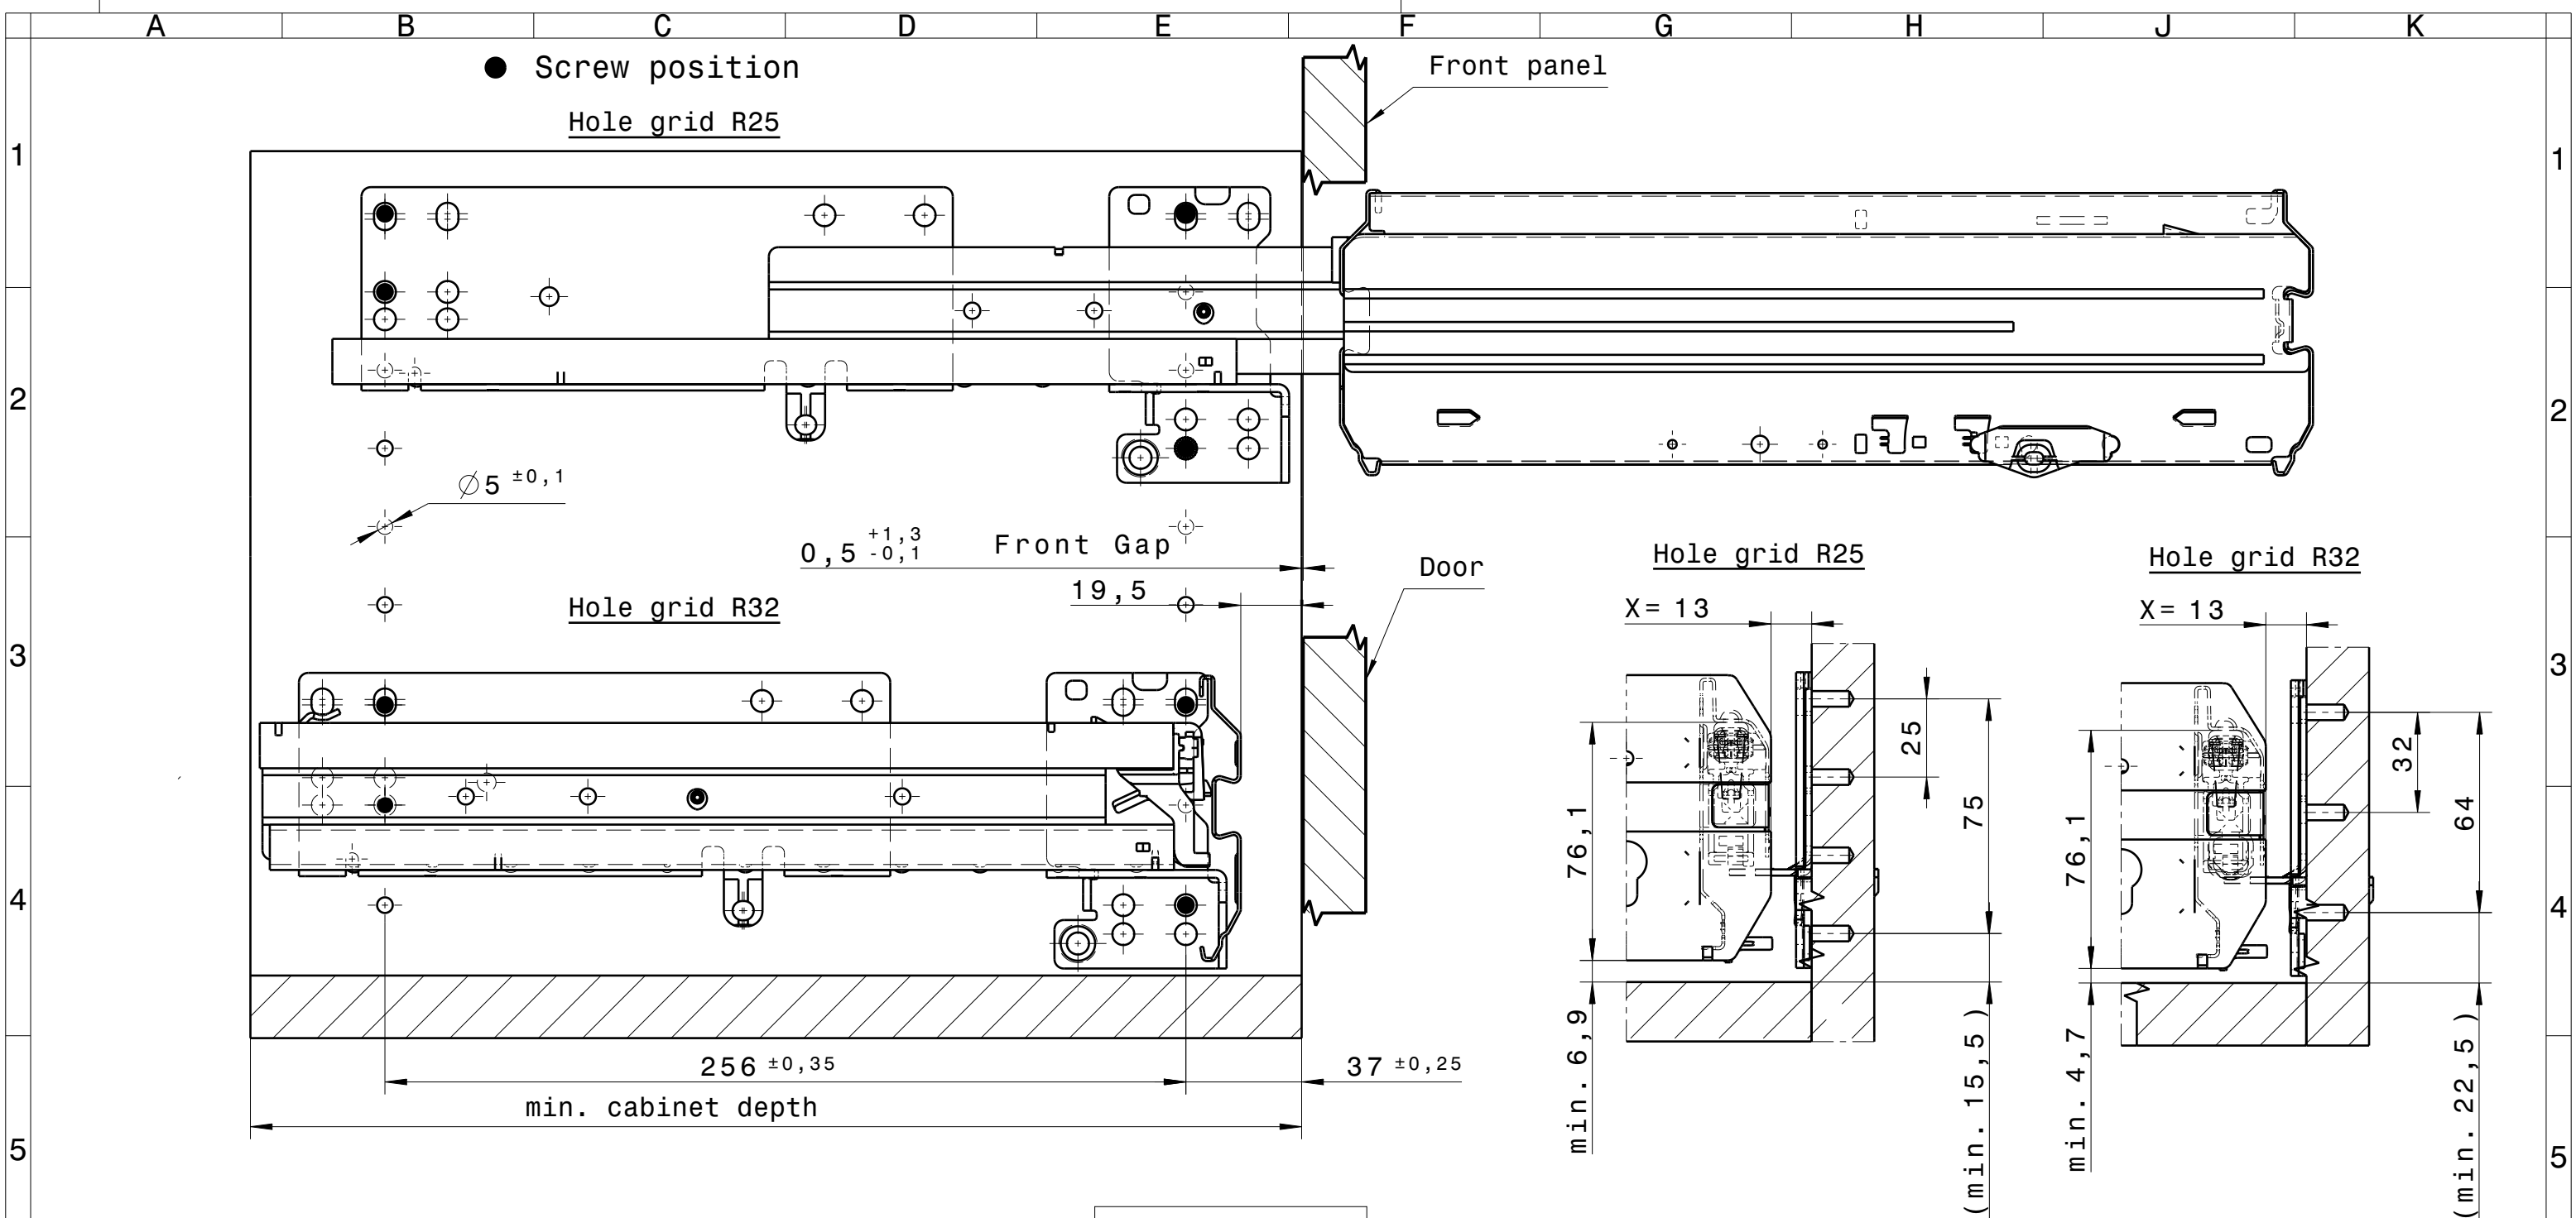

Field of application : Office furniture

Over extension slide

End Stop in open position

Corrosion test according to: DIN EN 15338

Slides tested according to: DIN EN 15338 Level 2

Use four pan head screws 6mm x 14mm BN 1802 per side to attach the slide with a torque of 1,5Nm + 0,3Nm to the cabinet

Mount the screws in circle holes first, from front to back !

Min. cabinet depth behind front panels: 316mm

behind doors: 336mm

Loading capacity (DIN EN 15338): 50 kg/GN

Over extension: 26,5mm

Steel drawer: Top 2000 with Orgaline: 310

Max. front height: R25: 6HE = 300mm

R32: 5HE = 320mm

Certificates:


RoHS : ZF 10001

PAK : ZF 10002

Recommended:

Self-closing system: SW SEZ 20 Links ZV 03005 Rechts ZV 03006

SW SEZ 40 Links ZV 10247 Rechts ZV 10248

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.														
Mass:	0,00	g	measures to be checked and control numbers according to HS 5000	Date	Name	Ind.	VS	Revision						
Volume:	0,00	cm³		16.11.15	Heckel	17	0							
Surface:		cm²	ISO 16016	11.12.13	Tocke	16	0							
	Spec. applicable			DIN A3	Date	Name		requirements for the corrosion resistance according to HS 150						
	Maturity Level: S			Detailer	09.12.09	Pechoucek		Level:						
	General tolerance according to -			Approv.	16.11.15	Heckel		Description						
	In case of change check			Scale	Proj.	State		QD R/310 Top 2000 SW HCR X=13 R 25/32 LR 37-256						
				1:2		RELEASED								
								Type	Drawing group	Drawing No.	Item No.	Index	Vers.	Sheet
Paul Hettich GmbH & Co. KG			Replacement for QR 05074 0000			Develop.-No.			Cust 0	from	QR 05074 0000	17 00		1 of 1
									to	QR 05074 0000	17 00			