



A B C D E F G H J K


1

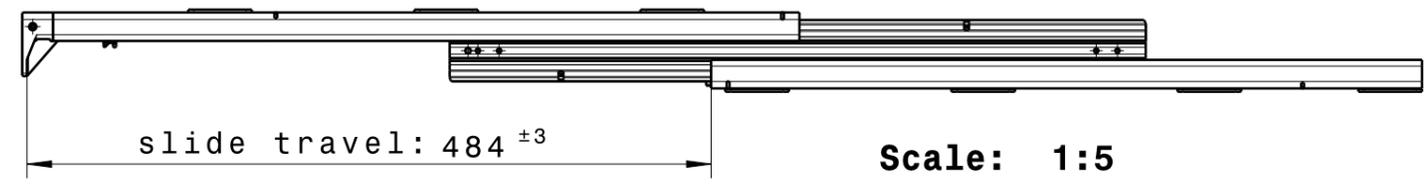


2

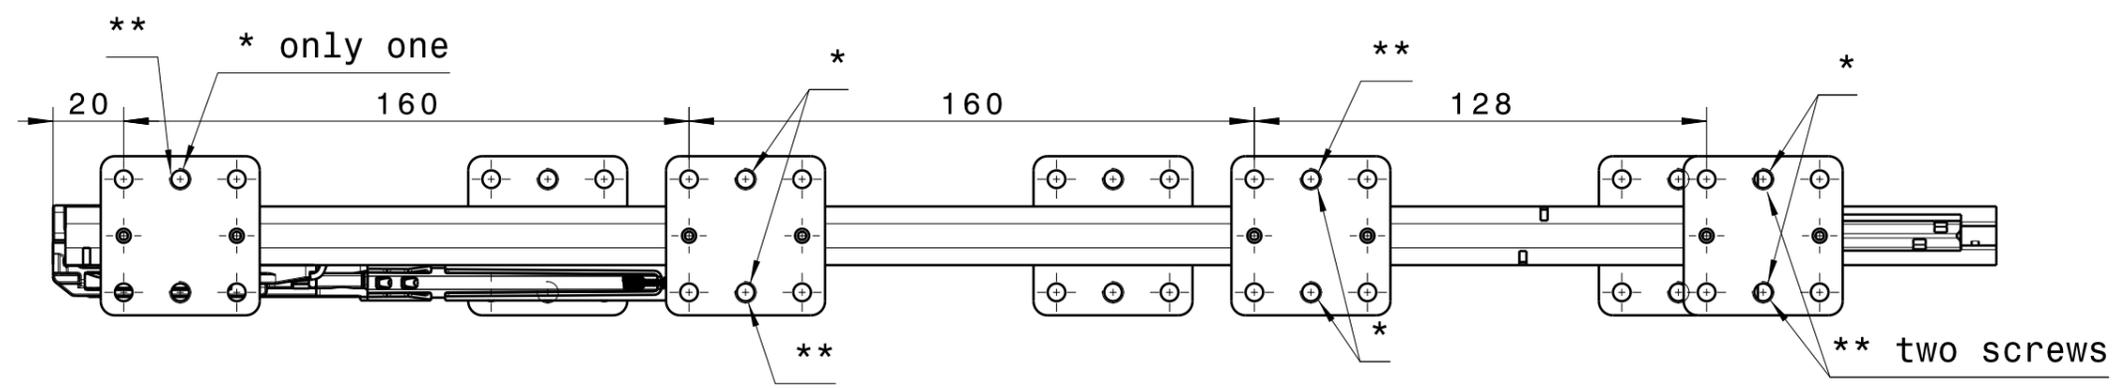


3

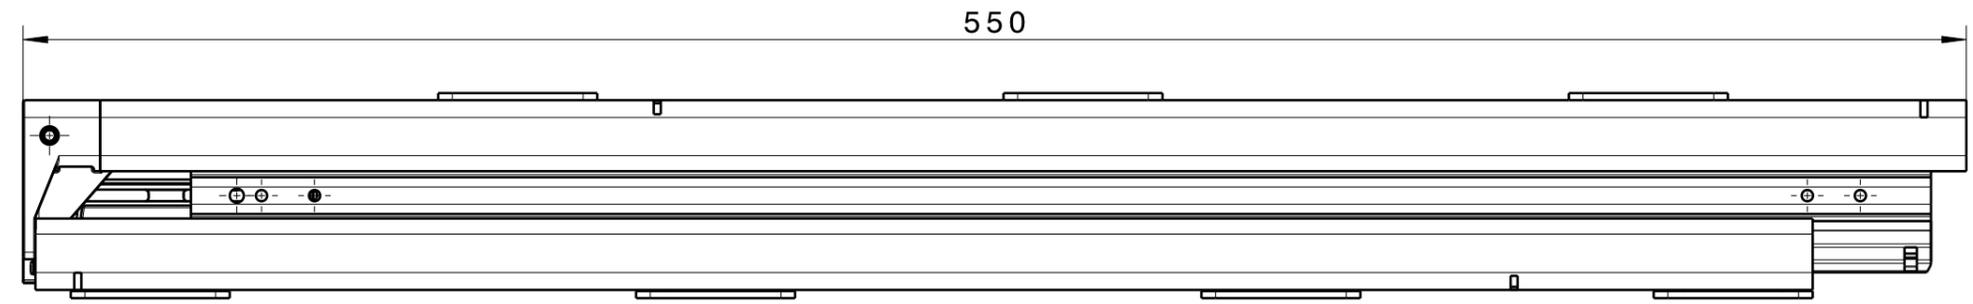

4



5

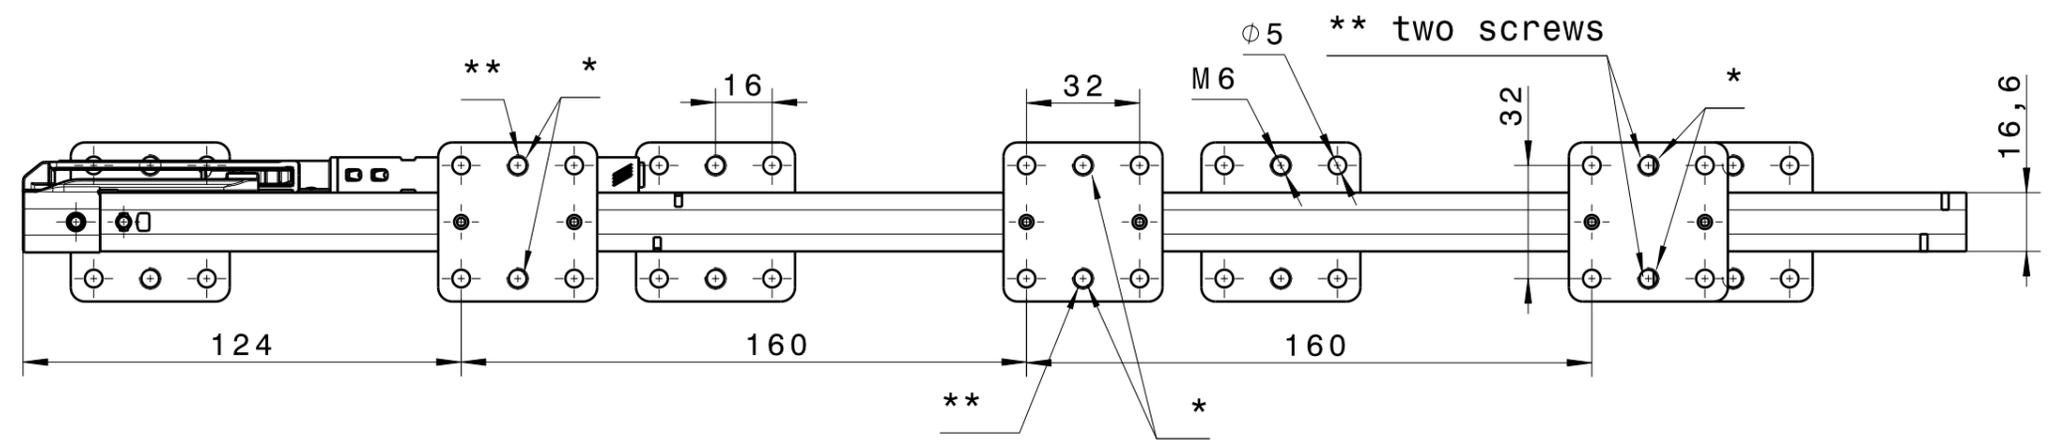


6

Requirements:

Corrosion test according to: DIN EN 15338
 Slides tested according to: DIN EN 15338 Level 2
 Use pan head screws 4mm x 16mm (two per plate)*
 or metrical thread screws diameter 6mm (one per plate) **
 to attach the slide to the cabinet

7

Min. cabinet depth: 553 mm
 Loading capacity (DIN EN 15338): 100 kg/GN
 In application with add.
 wheel support load capacity: 130 kg/GN

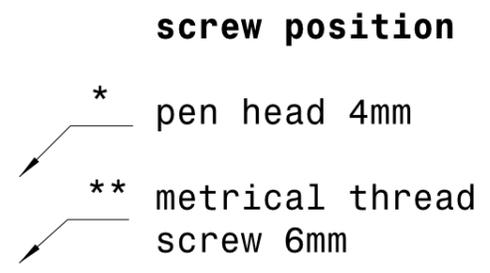

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.							
Mass:	0,00	g	measures to be checked and control numbers according to HS 5000	Date	04.08.14	Name	Beckend.
Volume:	0,00	cm ³				Ind.	1
Surface:		cm ²	ISO 16016	Date	10.01.11	VS	0
	Spec. applicable	DIN A3	Date	10.01.11	Name	requirements for the corrosion resistance according to HS 150	
	Maturity Level:	Detailer	08.09.14	Heckel	Level:		
	General tolerance according to	Scale	Proj.	State	Description		
	In case of change check	1:2	RELEASED	Big Duplex 550mm/ 484mm			
Paul Hettich GmbH & Co. KG	Replacement for	Develop.-No.	X 200072 1221 00 00	Type	0	Drawing group	QZ 10045 0000 01 00
	QZ 10045 0000			Cust	0	Drawing No.	QZ 10045 0000 01 00
				Item No.	0000 01 00	Index	01 00
				Vers.	1	Sheet	1
				of	1		

A B C D E F G H J K