



A B C D E F G H J K


1

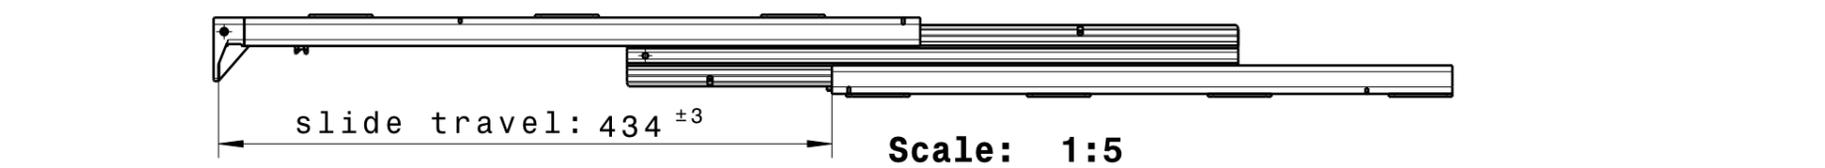



2

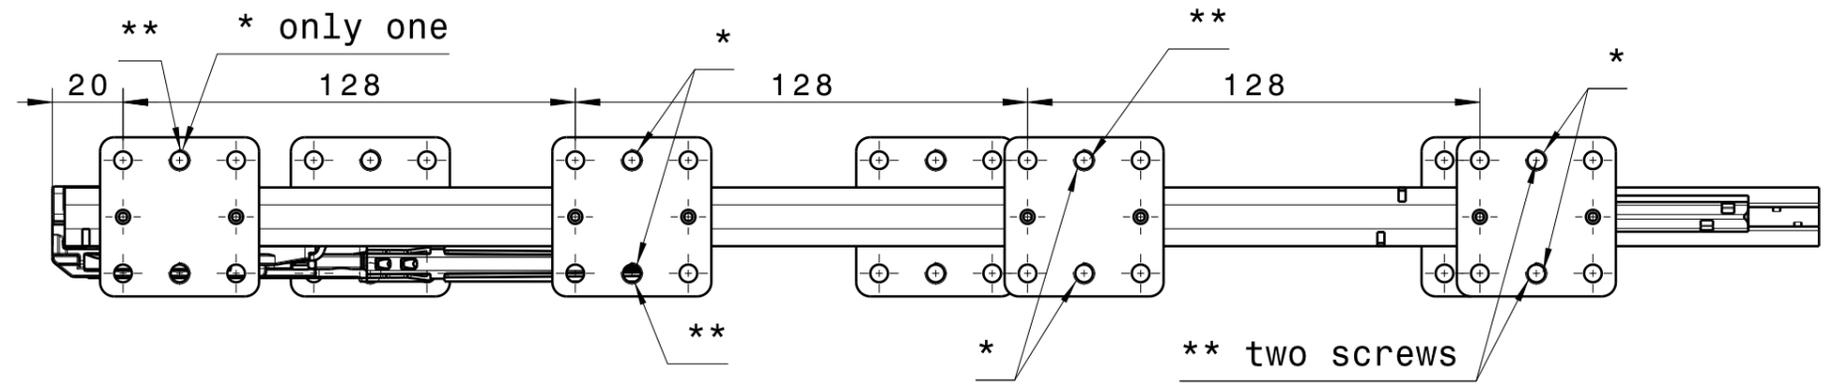

3

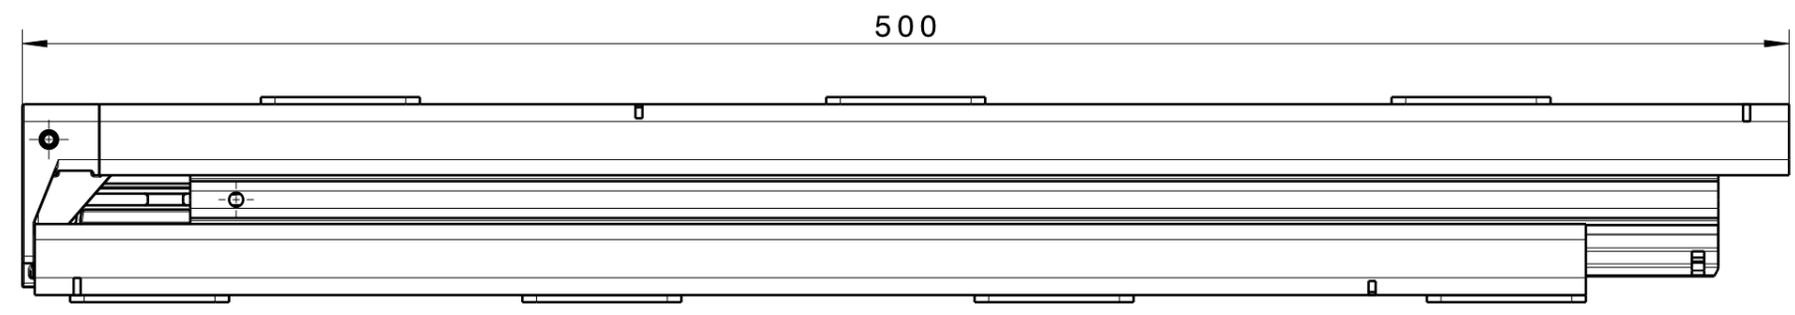

4

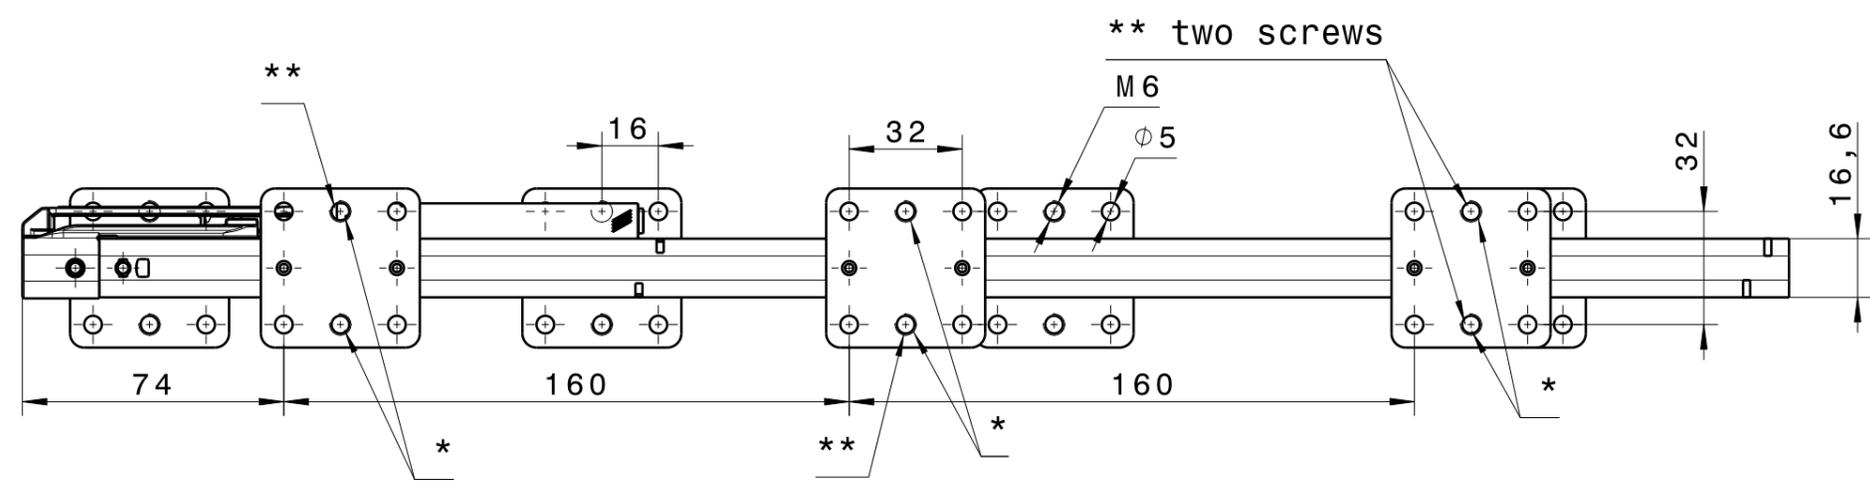

Requirements:

- Corrosion test according to: DIN EN 15338
- Slides tested according to: DIN EN 15338 Level 2
- Use pan head screws 4mm x 16mm (two per plate)* or metrical thread screws diameter 6mm (one per plate) ** to attach the slide to the cabinet

- Min. cabinet depth: 503 mm
- Loading capacity (DIN EN 15338): 100 kg/GN
- In application with add. wheel support load capacity: 130 kg/GN

- screw position**
- * pan head 4mm
 - ** metrical thread screw 6mm

Weitergabe sowie Vervielfaeltigung dieser Zeichnung, Verwendung und Mitteilung ihres Inhaltes sind verboten, soweit nicht ausdruuecklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patent-, Gebrauchsmuster-, oder Geschmacksmustereintragung vorbehalten. The reproduction, distribution and utilization of this drawing as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grand of a patent, utility model or design.

Mass:	g	Date	Name	Ind.	VS	Revision					
Volume:	cm ³	10.01.11	Strecha	0	0						
No.	Spec. applicable										
	XX X XX Control number according to HWN 0102	DIN A3	Date	Name	Material:						
	General tolerance according to	Detail.	10.01.11	Strecha	Finish:						
	In case of change check	Aprov.	09.12.11	C. Rose	Description						
		Scale	Proj.	State	Big Duplex 500mm/ 434mm						
	1:2			RELEASED	Type	Drawing group	Drawing No.	Item No.	Index	Vers.	Sheet
Paul Hettich GmbH & Co. KG	Replacement for QZ 10044 0000	Develop.-No. X 200072 1221 00 00	Cust 0	from	to	QZ 10044 0000 00 00	QZ 10044 0000 00 00				1 of 1

A B C D E F G H J K

6

7