

X-Mitter 1-Kanal Zigbee Sender



HALEMEIER

de Technik in Kürze

Halemeier Zigbee Controller zur Steuerung von Leuchten.

Geräteunterstützung:




- Nutzt das Protokoll Zigbee 3.0
- Unterstützt Zigbee TouchLink
- Kompatibel mit Zigbee Gateway-Universalprodukten

Batterie: CR2032 / 3 V

HINWEIS:



Bitte lesen Sie diese Anweisung aufmerksam vor Installation und Inbetriebnahme durch.

CR 2032 / 3 V

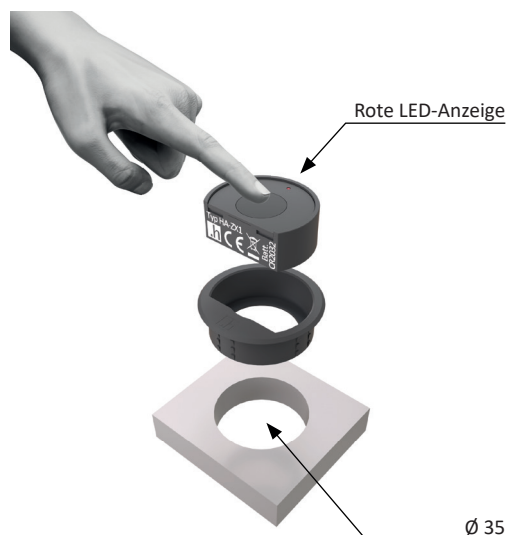
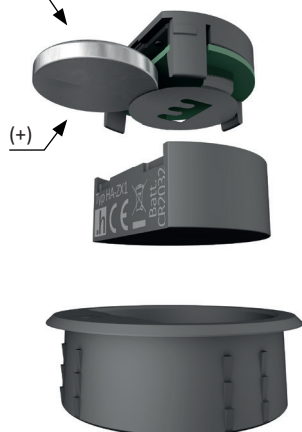


Kombinierbar mit:

31.100.01 / 31.102.01 Smartempfänger 12 V DC / 24 V DC

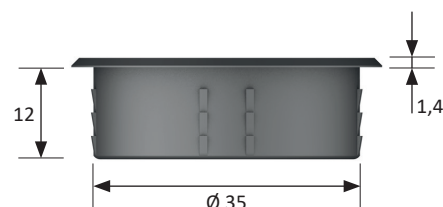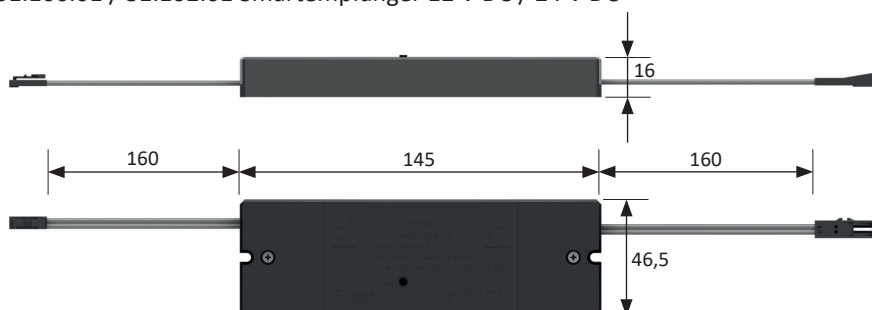

31.104.01 Smartempfänger 230 / 240 V AC * (keine Dimmfunktion)

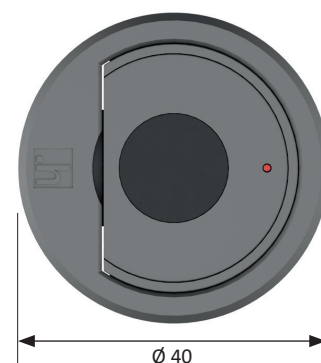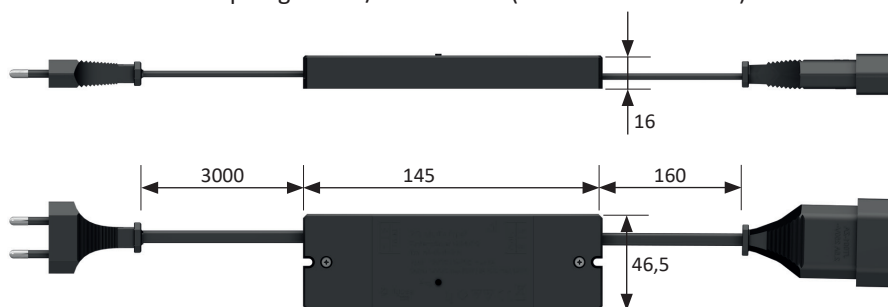

QR-Code für zusätzliche Anleitungen
z.B. zur Einbindung in Ihr SmartHome
System (Hue, Echo Plus, usw.)

QR-Code für den Halemeier Youtube Kanal
mit Anleitungsvideos, zur Einbindung in Ihr
SmartHome System (Hue, Echo Plus, usw.)



Bedienung / Programmierung



Wenn Sie den Empfänger in einem Set mit einem Sender bezogen haben, ist dieser bereits eingelernt. Nach Montage und Inbetriebnahme können Sie die Funktionen zur Einstellung des angeschlossenen Beleuchtungssystem direkt nutzen.

Einlernen - Verbindung



- über Touchlink zu einem anderen kompatiblen Gerät, wie z.B. Halemeier Zigbee Empfänger.

1. Empfänger in Anlernmodus setzen:

- Zigbee Empfänger: 4x Prog. Taste kurz drücken.

Visuelles Feedback:

- Eine angeschlossene Leuchte / LED blinkt mehrfach.
- Der Empfänger ist nun für 180 Sek. im Kopplungsmodus.

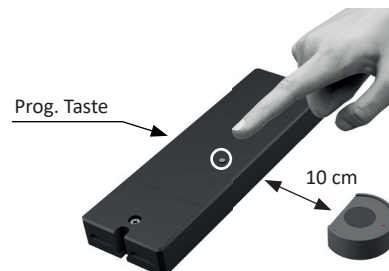

2. Einlernen der Fernbedienung:

- Zum Aktivieren der Fernbedienung aus dem Ruhemodus die Taste 1x kurz drücken.
- Anschließend die Taste 4x schnell drücken und gedrückt halten, bis die rote LED schnell flackert.
- Wieder loslassen und ca. 5 Sekunden abwarten. Die Fernbedienung ist verbunden.



Visuelles Feedback:


- Die rote Anzeige-LED blinkt mehrfach.

3. Factory Reset:



Entfernen aller Verbindungen, um eine neue Konfiguration zu starten. Alle Verbindungen zu Geräten und die Verbindung zum Netzwerk werden gelöscht.

- 5x Drücken der Taste und Halten bis die rote Anzeige-LED 3x blinkt.




Visuelles Feedback:

- Die rote Anzeige-LED blinkt 3x.



Den Empfänger zurücksetzen:

- Dazu die Prog. Taste auf dem Empfänger, 5x kurz drücken.

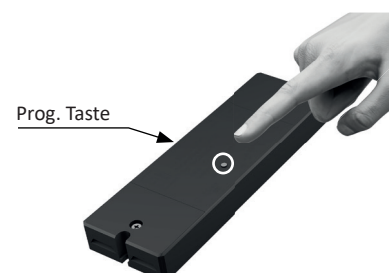

X-Mitter 1-channel Zigbee transmitter



HALEMEIER

en Technical details

Halemeier Zigbee Controller for controlling lights.

Device support




- Uses the Zigbee 3.0 protocol
- Supports Zigbee TouchLink
- Compatible with Zigbee gateway universal products

Battery: CR2032 / 3 V

Note:


Please read these instructions carefully before installation and commissioning.

CR 2032 / 3 V

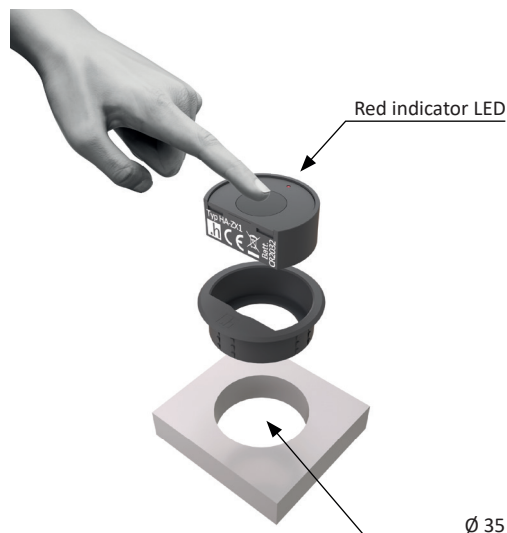
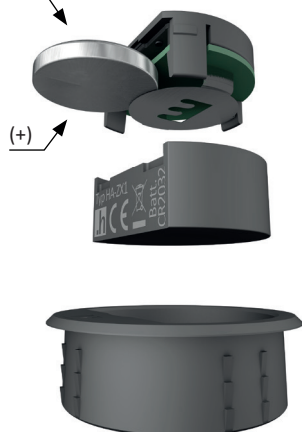


Combinable with:

31.100.01 / 31.102.01 Smart receiver 12 V DC / 24 V DC

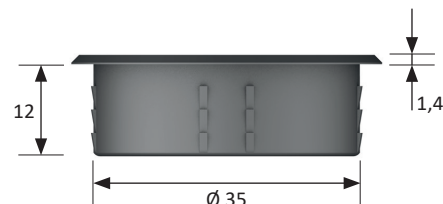

31.104.01 Smart receiver 230 / 240 V AC * (no dimming function)

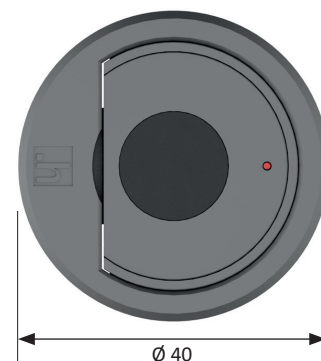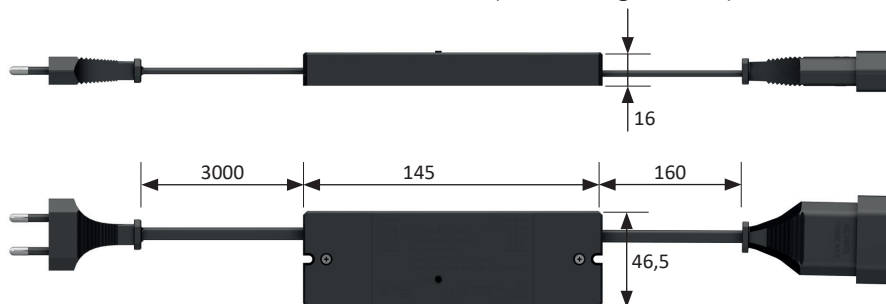

QR code for additional instructions,
e.g. how to integrate with your smart
home system (Hue, Echo Plus, etc.)

QR code for the Halemeier YouTube channel
with instructional videos for integration into
your smart home device (Hue, Echo Plus, etc.)



X-Mitter 1-channel Zigbee transmitter



HALEMEIER

Operation / Programming




If you purchased the receiver in a set with a transmitter, it has already been taught. After installation and commissioning, you can directly use functions to adjust the connected lighting system.

Teach-in - Connection

- via Touchlink to another compatible device, e.g. Halemeier Zigbee Transmitter.


1. Set receiver in teach-in mode:

- Zigbee receiver: Shortly press the Prog. button 4x.



Visual feedback:

- A connected light / LED flashes several times.
- The receiver is now in pairing mode for 180 seconds.

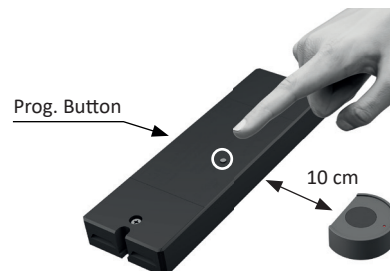

2. Einlernen der Fernbedienung:

- To activate the remote control from sleep mode, press the button once briefly.
- Then press and hold the button 4 times quickly until the red LED flickers rapidly.
- Release again and wait approx. 5 seconds. The remote control is connected.



Visual feedback:


- The red indicator LED flashes several times.

3. Factory Reset:



Remove all connections to start a new configuration. All connections to devices and the connection to the network are deleted.

- Press and hold the button 5 times until the red indicator LED flashes 3 times.



Visual feedback:

- The red indicator LED flashes 3 times.



Reset the receiver:

- To do this, briefly press the Prog. button on the receiver 5 times.

