


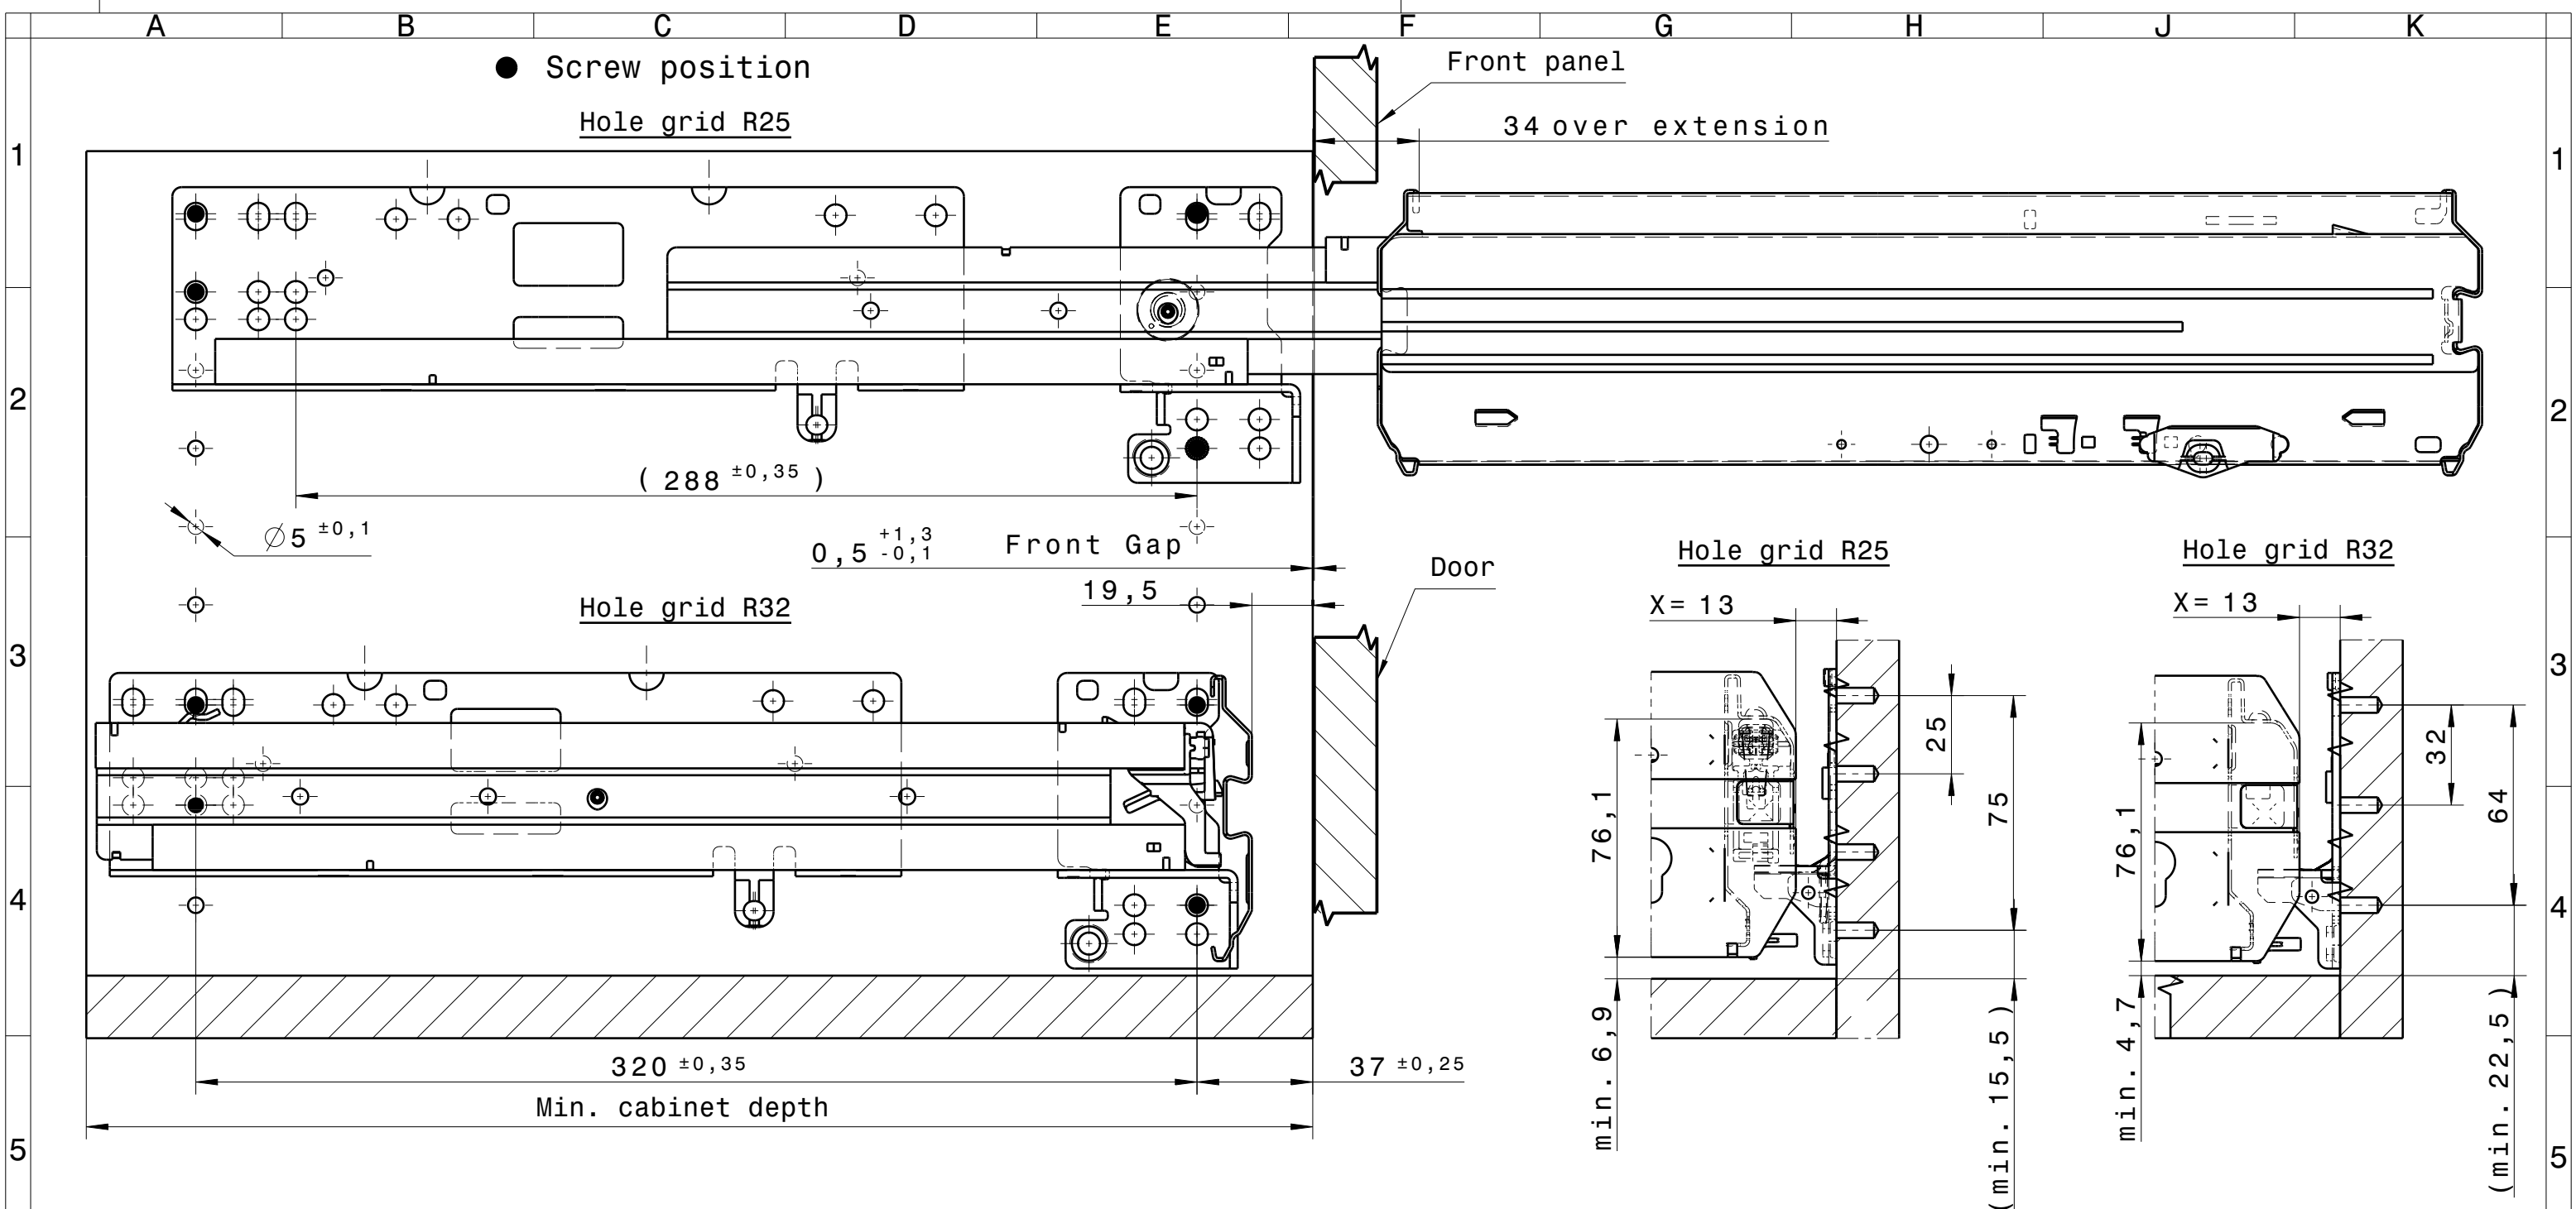

Field of application : Office furniture
Over extension slide
End Stop in open position
Corrosion test according to: DIN EN 15338
Slides tested according to: DIN EN 15338 Level 2
Use four pan head screws 6mm x 14mm BN 1802 per side to attach the slide with a torque of 1,5Nm + 0,3Nm to the cabinet
Mount the screws in circle holes first, from front to back !
Min. cabinet depth behind front panels: 372mm
behind doors: 392mm
Loading capacity (DIN EN 15338): 60 kg/GN
Over extension: 35mm
Steel drawer: Top 2000 with Orgaline: 352
Max. front height: R25: 6HE = 300mm
R32: 5HE = 320mm

Recommended:
Self-closing system: Silent System
(Example) left ZV 03249
right ZV 03250

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.													
Mass:	0,00	g	measures to be checked and control numbers according to HS 5000	Date	Name	Ind.	VS	Revision					
Volume:	0,00	cm³		04.06.18	Koeller	9	0						
Surface:		cm²	ISO 16016	15.09.15	Heckel	8	0						
	Spec. applicable			DIN A3	Date	Name		requirements for the corrosion resistance according to HS 150					
	Maturity Level: S			Detailer	19.08.08	Mehrhoth		Level:					
	General tolerance according to -			Approv.	04.06.18	Koeller		Description					
	In case of change check			Scale	Proj.		State	QD ZXR/352 Top 2000 SW X=13 R25/32 LR 37-320					
				1:2		RELEASED							
Replacement for			Develop.-No.				Cust	from	QR 05120 0000 09 00				Sheet 1 of 1
QR 05120 0000			X 000947 0025 00 00				1	to	QR 05120 0000 09 00				