
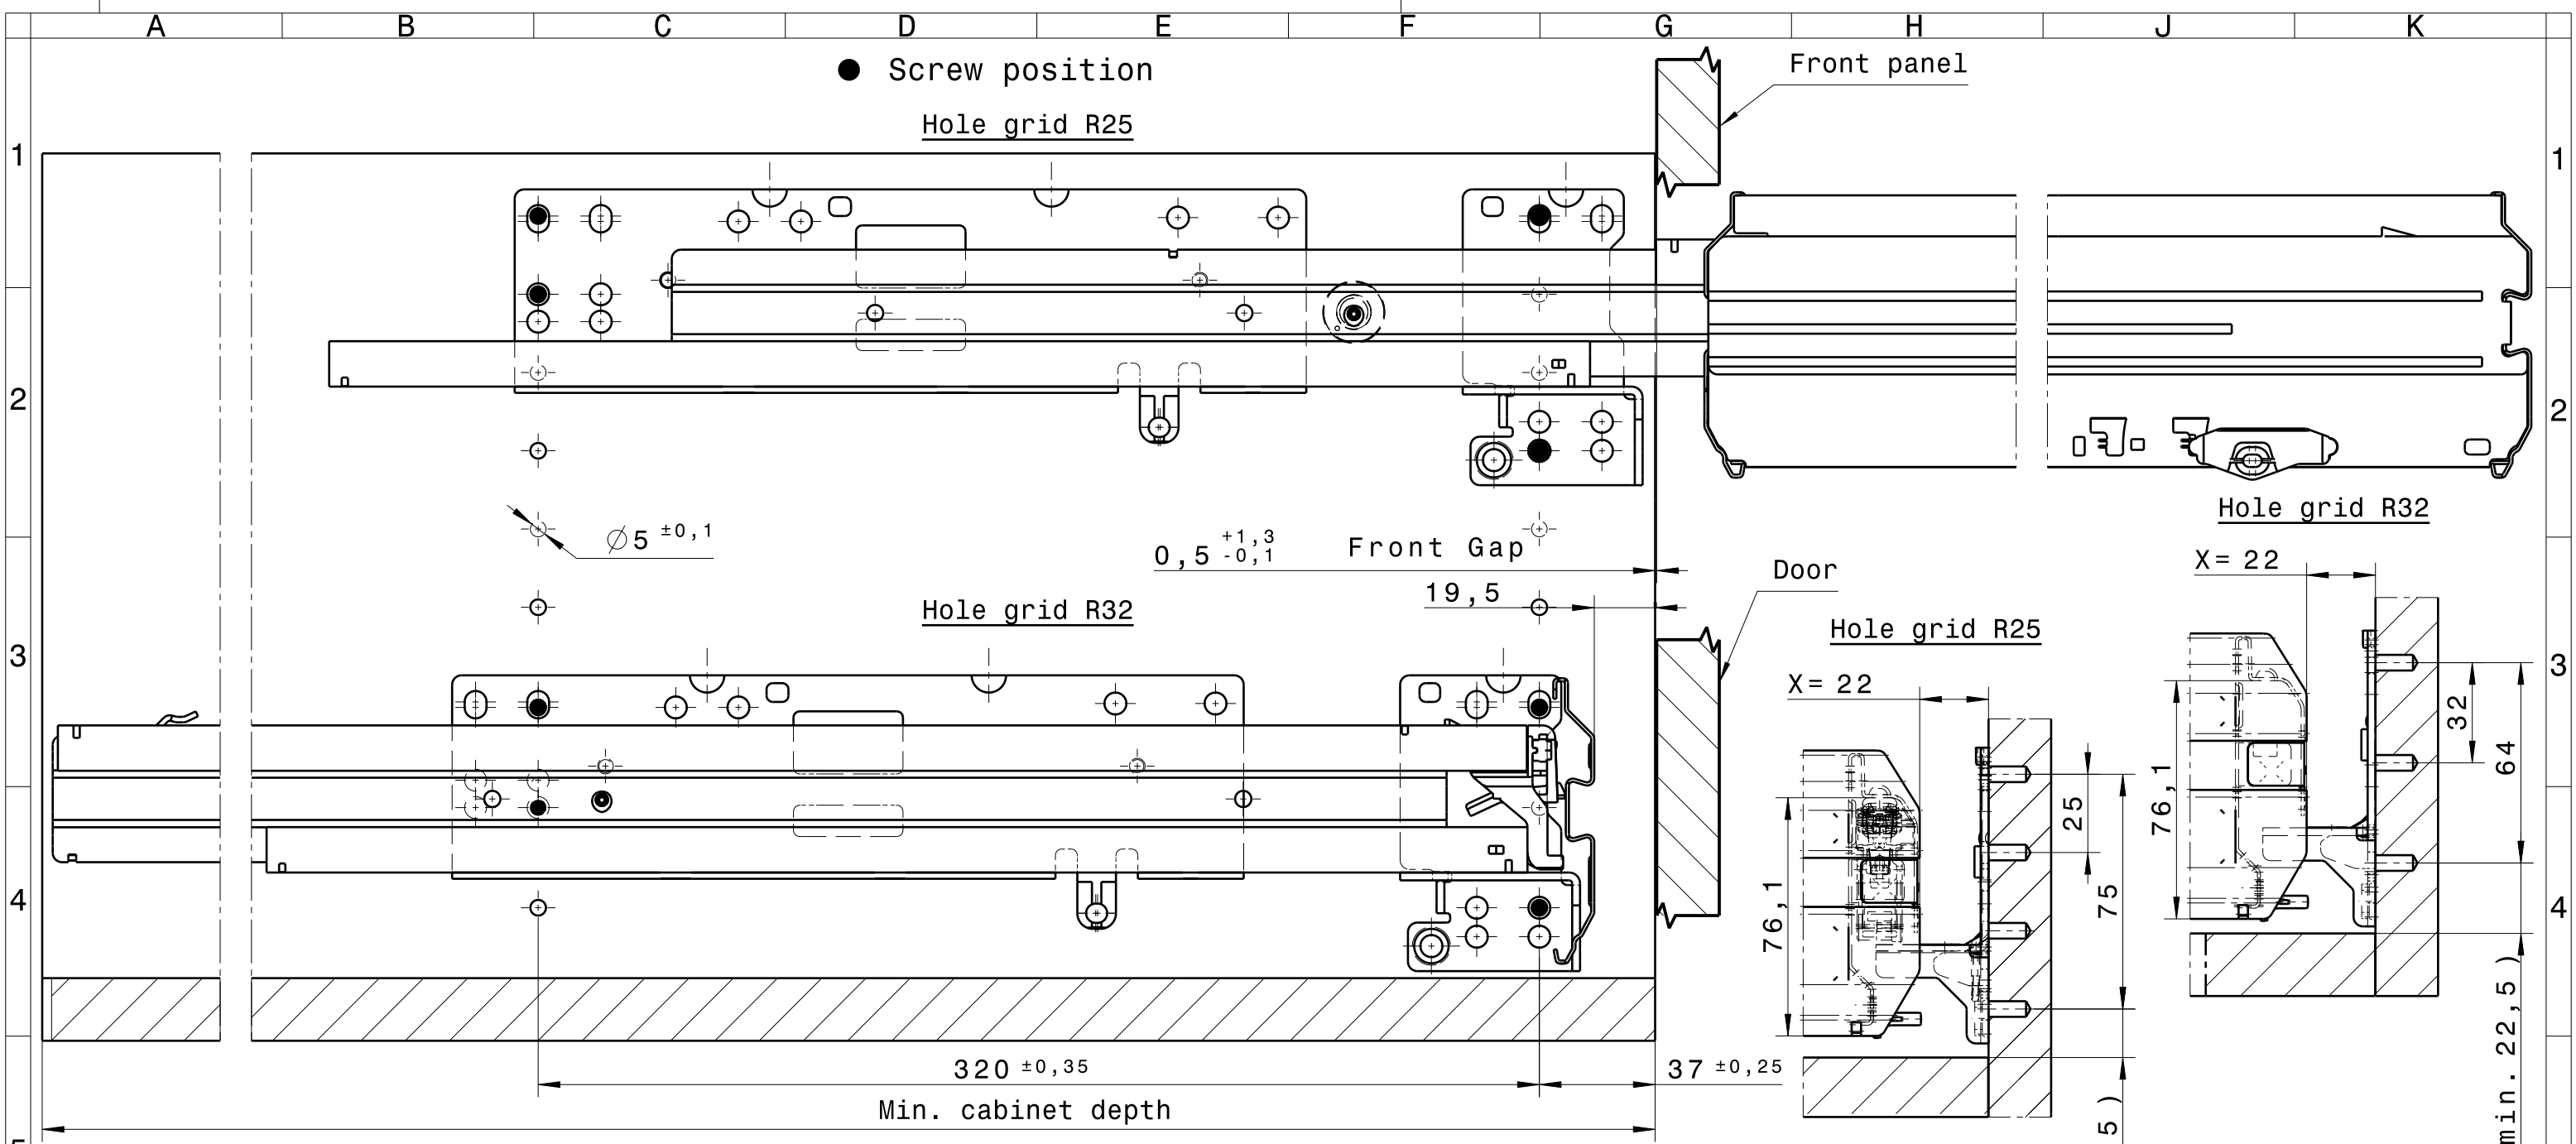




Field of application : Office furniture
Over extension slide
End Stop in open position
Corrosion test according to: DIN EN 15338
Slides tested according to: DIN EN 15338 Level 2
Use four pan head screws 6mm x 14mm BN 1802 per side to attach
the slide with a torque of 1,5Nm + 0,3Nm to the cabinet
Mount the screws in circle holes first, from front to back !
Min. cabinet depth behind front panels: 538mm
behind doors: 558mm
Loading capacity (DIN EN 15338): 65 kg/GN
Over extension: 30mm
Steel drawer: Top 2000 with Orgaline: 517
Max. front height: R25: 6HE = 300mm
R32: 5HE = 320mm
Recommended:
Self-closing system: left: ZV 03009 right: ZV 03010

Certificates:
RoHs : ZF 10001
PAK : ZF 10002

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grand of a patent, utility model or design.														
Mass: 0,00 g		measures to be checked and control numbers according to HS 5000		Date	Name	Ind.	VS	Revision						
Volume: 0,00 cm³				06.02.13	Benes	6	0							
Surface: cm²		ISO 16016		10.01.12	Kriz	5	0							
		Spec. applicable		DIN A3	Date	Name		requirements for the corrosion resistance according to HS 150						
		Maturity Level: S		Detailer	10.03.10	Pechoucek		Level:						
		General tolerance according to -		Approv.	14.11.13	Tocke		Description						
		In case of change check		Scale	Proj.	State		QD ZR/517 Top 2000 SW X=22 R25/32 LR 37-320						
				1:1									RELEASED	
Paul Hettich GmbH & Co. KG		Replacement for QR 06051 0000		Develop.-No.			Cust 0		from to	QR 06051 0000 06 00	QR 06051 0000 06 00	Sheet 1 of 1		