

A

B

C

D

E

F


G

H

J


K

1

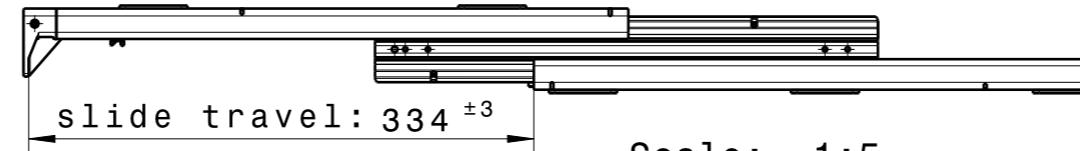


Scale: 1:5


2

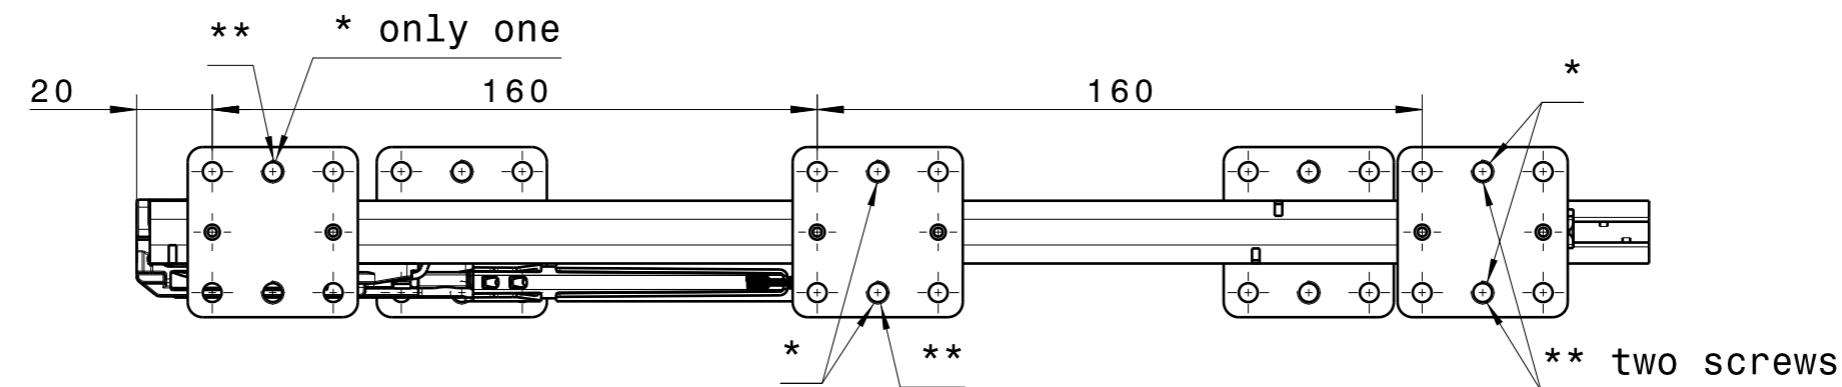


3

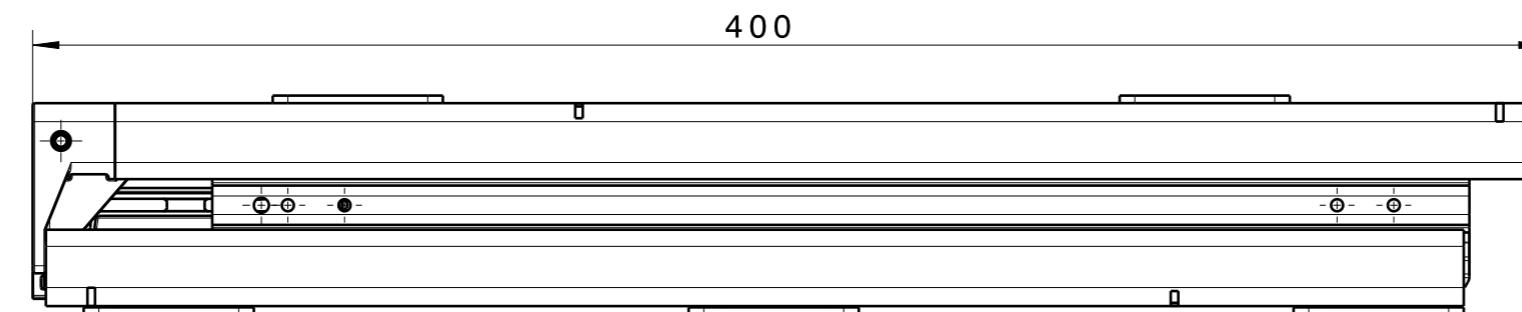

4

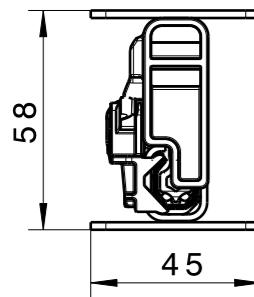

5

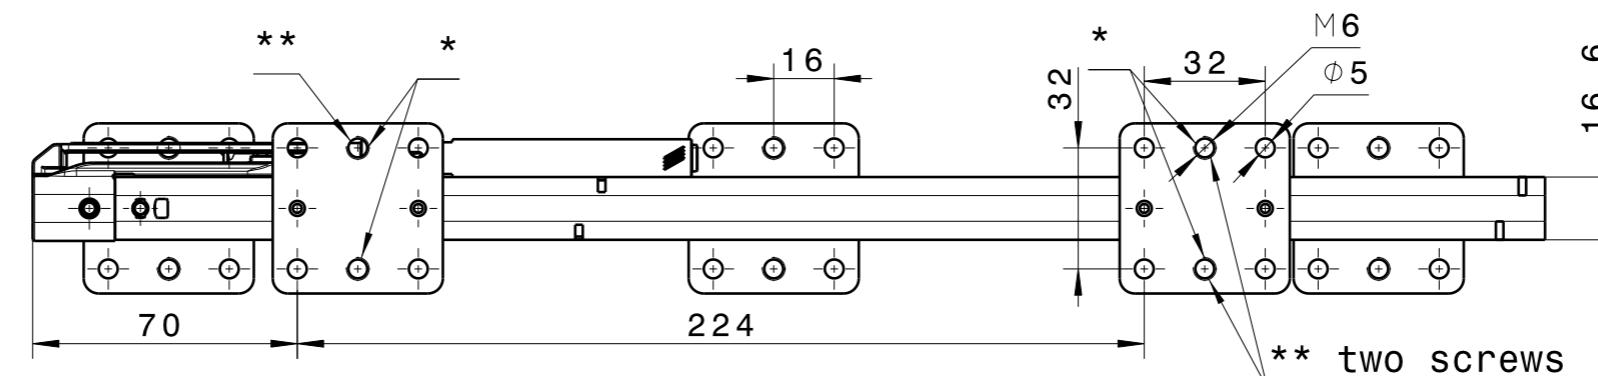

### Requirements:

Corrosion test according to: DIN EN 15338

Slides tested according to: DIN EN 15338 Level 2

Use pan head screws 4mm x 16mm (two per plate)\*

or metrical thread screws diameter 6mm (one per plate) \*\*  
to attach the slide to the cabinet

Min. cabinet depth: 403 mm

Loading capacity (DIN EN 15338): 100 kg/GN

In application with add.

wheel support load capacity: 130 kg/GN

### screw position

\* pen head 4mm

\*\* metrical thread  
screw 6mm

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Mass: 0,00 g	measures to be checked and control numbers according to HS 5000	Date 05.05.14	Name Heckel	Ind. 1	VS 0	Revision
Volume: 0,00 cm <sup>3</sup>		07.01.11	Strecha	0	0	
Surface: cm <sup>2</sup>	ISO 16016					
Spec. applicable	DIN A3	Date	Name			requirements for the corrosion resistance according to HS 150
Maturity Level:	Detailer	07.01.11	Strecha			Level:
General tolerance according to	Approv.	21.08.14	Heckel			Description
In case of change check	Scale	Proj.	State			Big Duplex 400mm/ 334mm
	1:2			RELEASED		
Paul Hettich GmbH & Co. KG	Replacement for QZ 10042 0000	Develop.-No. X 200072 1221 00 00	Type Cust from 0 to QZ 10042 0000 01 00 of 1	Drawing group from QZ 10042 0000 01 00 to QZ 10042 0000 01 00 of 1	Drawing No. Item No. Index Vers.	Sheet 1 1

**Hettich**

A

B

C

D

E

F

G

H

J

K