
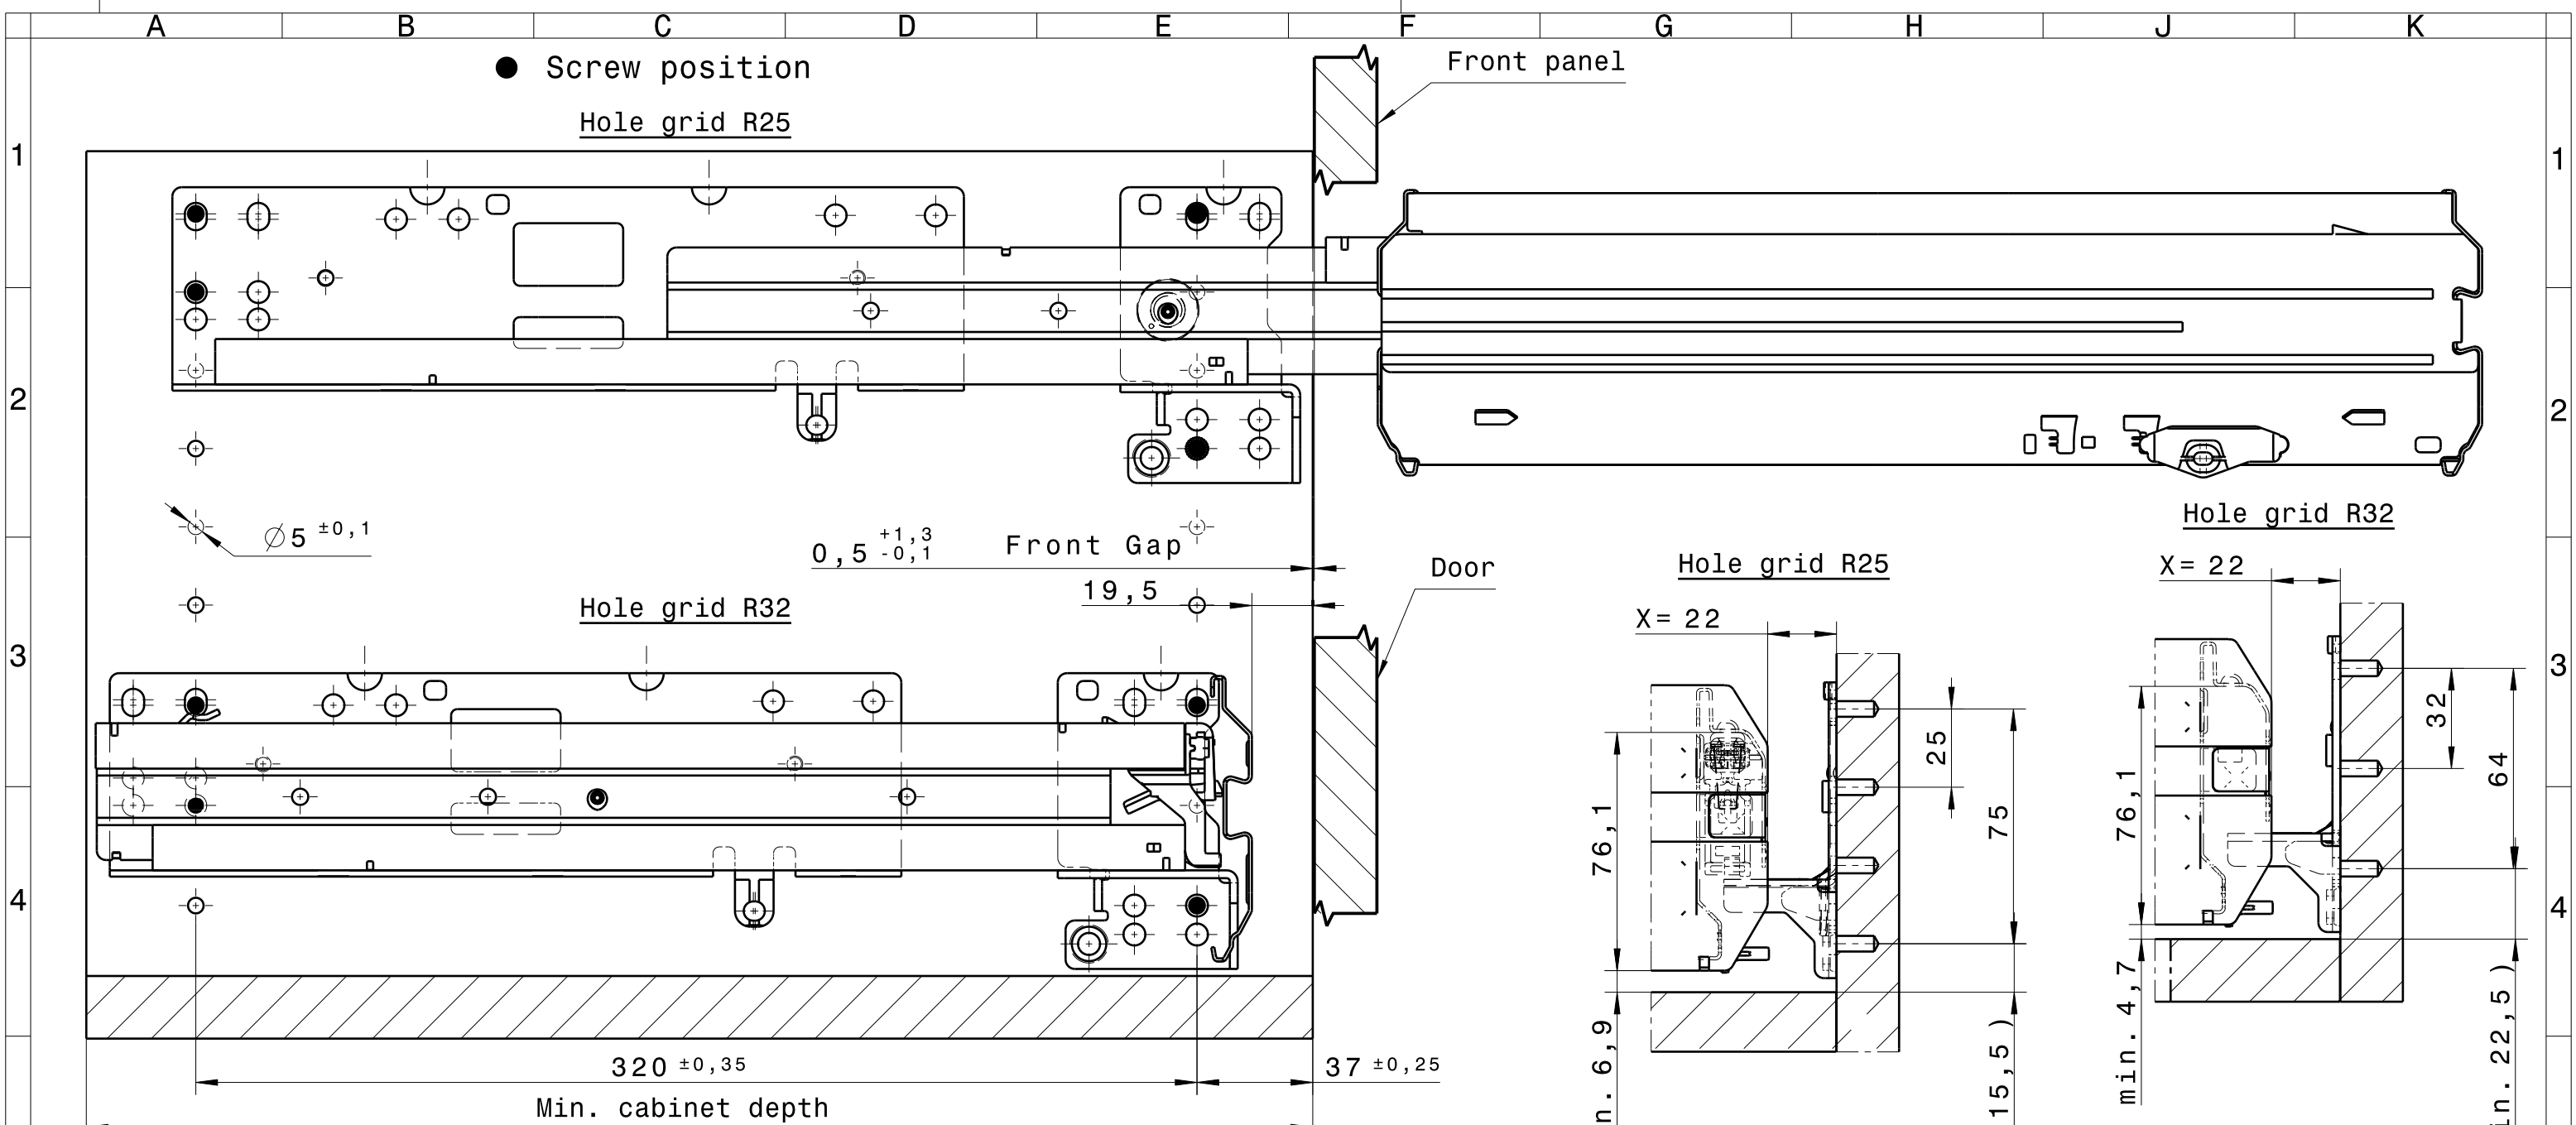




Field of application : Office furniture
Over extension slide
End Stop in open position
Corrosion test according to: DIN EN 15338
Slides tested according to: DIN EN 15338 Level 2
Use four pan head screws 6mm x 14mm BN 1802 per side to attach the slide with a torque of 1,5Nm + 0,3Nm to the cabinet
Mount the screws in circle holes first, from front to back !
Min. cabinet depth behind front panels: 372mm
behind doors: 392mm
Loading capacity (DIN EN 15338): 60 kg/GN
Over extension: 35mm
Steel drawer: Top 2000 with Orgaline: 352
Max. front height: R25: 6HE = 300mm
R32: 5HE = 320mm
Recommended:
Self-closing system: left: ZV 03009 right: ZV 03010

Certificates:

RoHs : ZF 10001
PAK : ZF 10002

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.													
Mass:	0,00	g	measures to be checked and control numbers according to HS 5000	Date	Name	Ind.	VS	Revision					
Volume:	0,00	cm³		05.02.13	Benes	7	0						
Surface:		cm²	ISO 16016	06.11.12	Tocke	6	0						
 Paul Hettich GmbH & Co. KG	Spec. applicable			DIN A3	Date	Name		requirements for the corrosion resistance according to HS 150					
	Maturity Level: S			Detailer	15.09.09	Pechoucek		Level:					
	General tolerance according to -			Approv.	13.11.13	Tocke		Description					
	In case of change check			Scale	Proj.	State		QD ZXR/352 Top 2000 SW X=22 R25/32 LR 37-320					
				1:1		RELEASED							
Replacement for			Develop.-No.				Type	Drawing group	Drawing No.	Item No.	Index	Vers.	Sheet
QR 06049 0000							Cust	from	QR 06049	0000	07	00	1 of 1
							0	to	QR 06049	0000	07	00	